

## JA10-001 10 Transmit Position - Audio Controller



### **Description**

The JA10-001 Audio Controller has been designed to meet the increasing radio communications requirements for many operators, with a capability to control up to ten transceivers. Occupying the same panel space as the JA94/95 series, this audio controller is a compact, lightweight solution incorporating the latest technology. The unit will support up to eight users, pilot, co-pilot and up to six passengers.

By using a Windows<sup>®</sup> based application (ProCS<sup>™</sup>), configuration settings may be changed via a 3.5mm jack socket on the front panel. Field replaceable illuminated legends mean that the dealer only needs to order one version of the controller for many different mission configurations.

#### **Features**

- Up to 8 users
- Field configurable settings
- Field replaceable legends
- Adjustable output and input levels
- Balanced ICS, CVR, & transmit mic. outputs
- Adjustable CVR output level
- Front panel music input


- 5, 14 and 28 Vdc lighting voltage selection
- Music muting
- · Individual mic. gating
- Tx capability for 4 users
- Transmit select annunciators
- ICS PTT for all users





# **JA10-001 Specifications**

### Installation

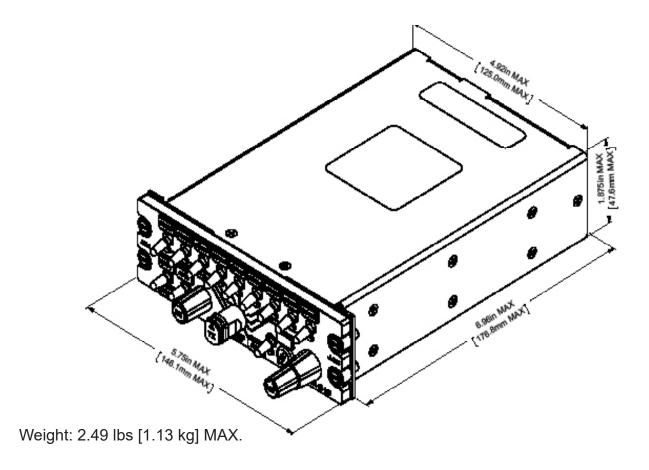

### **Environment and Performance**

| Transceivers       |                         | 10 Comms  |
|--------------------|-------------------------|---|
| Receiver Input     |                         | 4 Receivers, 4 Directs, 2 Music Inputs, 1 ICS Tie |
| Number of Headsets |                         | 8 users   |
| Electrical         | Power<br>Lighting       | 28 Vdc @ (1A) max<br><10mA @ 5, 14, 28 Vdc        |
| Temperature        | Operational<br>Survival | -45 °C to +70 °C<br>-55 °C to +85 °C              |
| Altitude           |                         | 50,000 ft. max                                    |
| Humidity           |                         | 95%   |
| Shock              |                         | 6g (any axis)                                     |
| Headphone          |                         | 250 mW into 600 ohms                              |
| TSO Compliance     |                         | Contact JAC for TSO status                        |
| Installation Kit   |                         | INST-JA10   |

