



Make Better Use of Empty Panel Space with JAC Glove Boxes

JA72-510 Glove Box Dual USB-C Chargers Data Sheet



Description


Charge your portable devices and keep organized with the JA72-510. As well as a large aperture for storage (4.4 ins x 2.35 ins, 11 x 6 cms), these units provide Dual USB Type C charging ports in a single Dzus mount panel. Both of the Type C ports are capable of supplying 5 / 9 / 12 / 15 Volts DC at up to 3.0 Amps and 20 Volts DC at 2.25 Amps, or 45 Watts Max.

Alternative sizes and styles of Glove boxes and USB chargers may be found at <http://www.jupiteravionics.com/productglovebox.php>



JA72-510

Installation

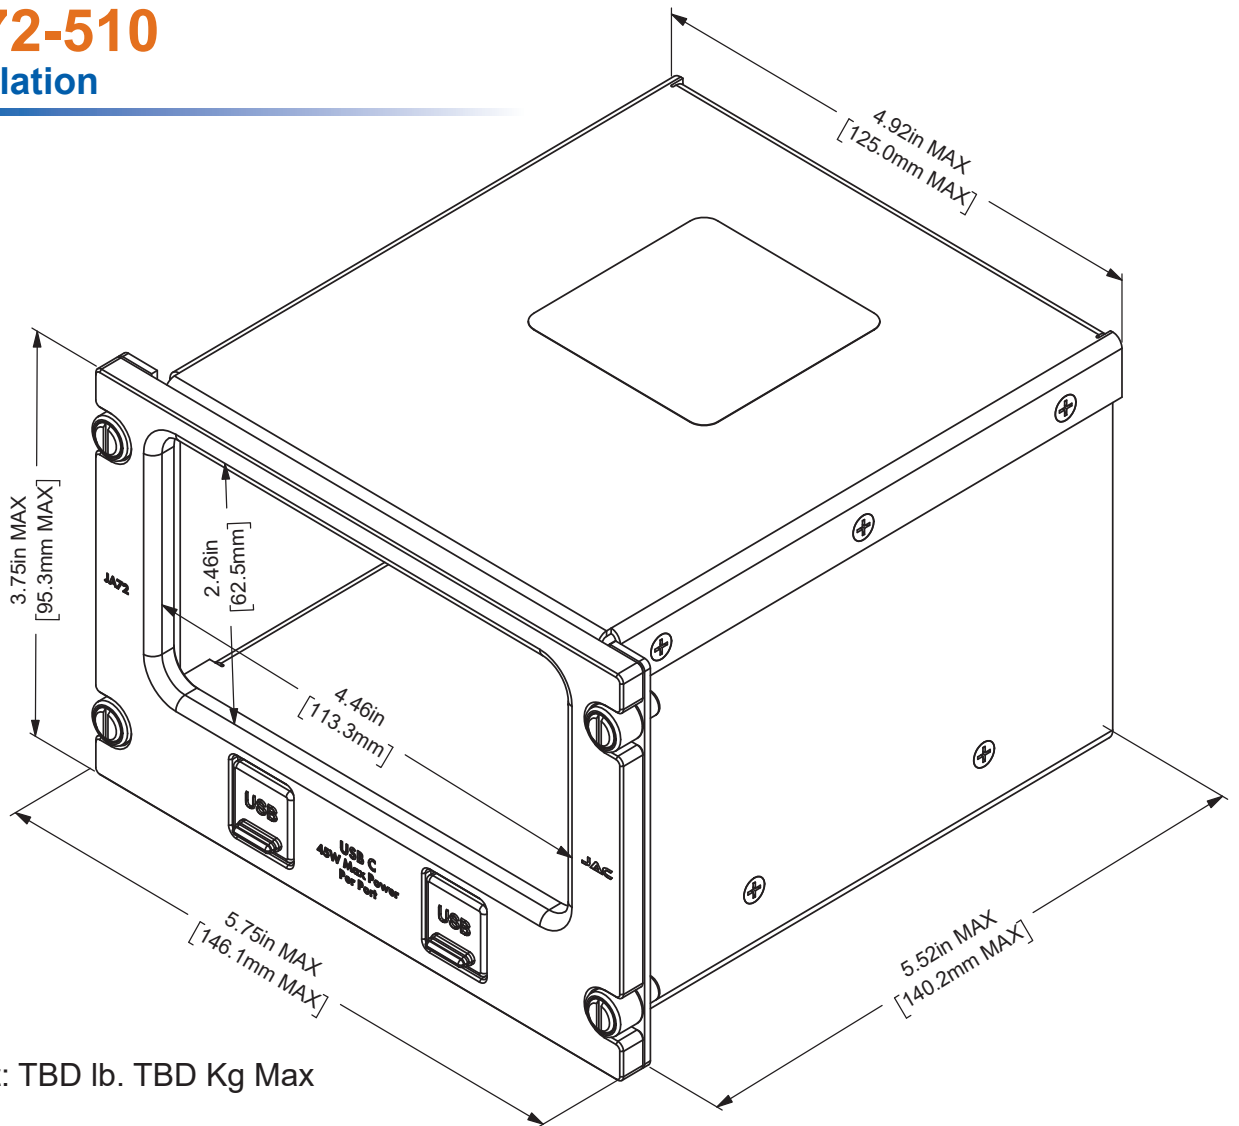

Weight: TBD lb. TBD Kg Max

Environment and Performance

Input Current	3.25 A Max @ 28 Vdc
Input Voltage Range	20.5 to 32.2 Vdc
Operating Temperature	-45 °C to +70 °C
Survival Temperature	-55 °C to +85 °C
Altitude	55,000 ft. max
TSO Compliance	Contact JAC for TSO status

Installation Kit	INST-JA72
Storage Capacity	1 lb. [450 g]