



## JA74-410 Dual USB Charging Port Data Sheet



### Description


The JA74-410 incorporates a USB Type A and a USB Type C charging ports into a single, compact Dzus mount panel. The Type A port is capable of supplying 5 Volts DC at up to 2.1 Amps and the Type C port is capable of supplying 5 / 9 / 12 / 15 Volts DC at up to 3.0 Amps and 20 Volts DC at 2.25 Amps or 45 Watts max.

Alternative sizes and styles of Glove boxes and USB chargers may be found at <http://www.jupiteravionics.com/productglovebox.php>



# JA74-410 Specifications

## Installation

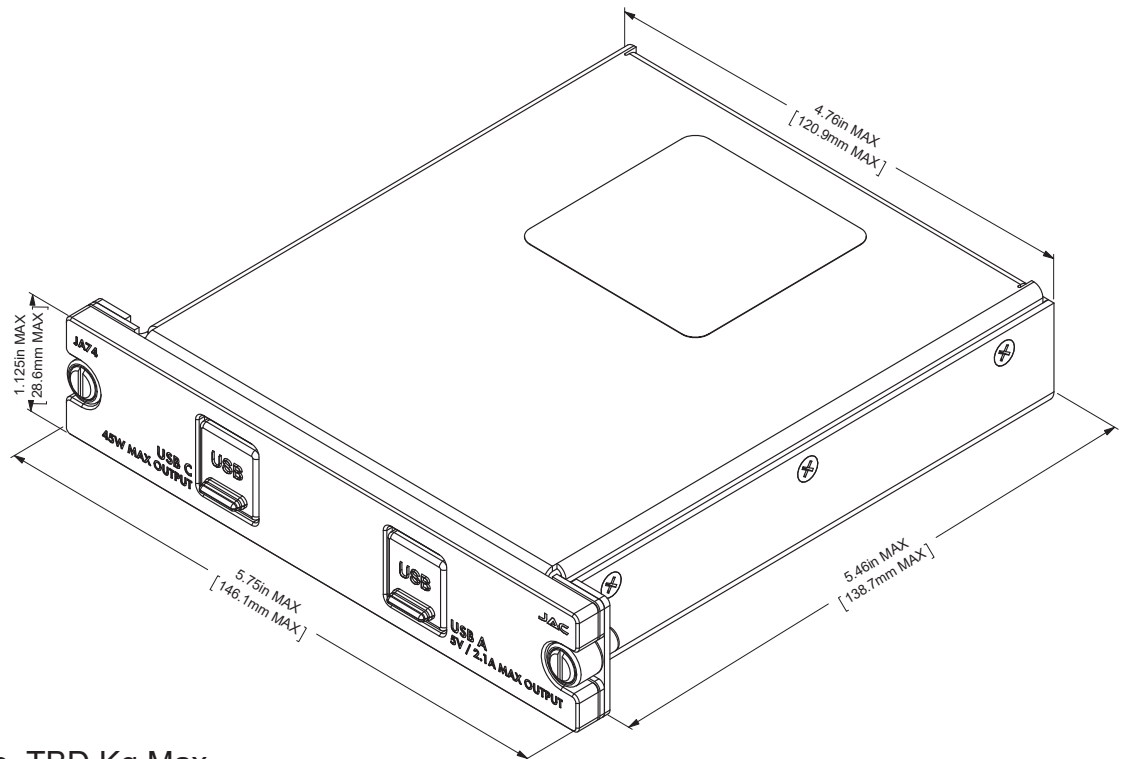

Weight: TBD lb. TBD Kg Max

## Environment and Performance

Input Current	3.25 A Max @ 28 Vdc
Input Voltage Range	20.5 to 32.2 Vdc
Operating Temperature	-45 °C to +70 °C
Survival Temperature	-55 °C to +85 °C
Altitude	55,000 ft. max
TSO Compliance	Contact JAC for TSO status

Installation Kit	INST-JA74
------------------	-----------