



JA74-510 Dual USB-C Charging Ports

Data Sheet



Description


The JA74-510 incorporates Dual USB Type C charging ports into a single, compact Dzus mount panel. Both of the Type C ports are capable of supplying 5 / 9 / 12 / 15 Volts DC at up to 3.0 Amps and 20 Volts DC at 2.25 Amps, or 45 Watts Max.

Alternative sizes and styles of Glove boxes and USB chargers may be found at <http://www.jupiteravionics.com/productglovebox.php>



JA74-510 Specifications

Installation

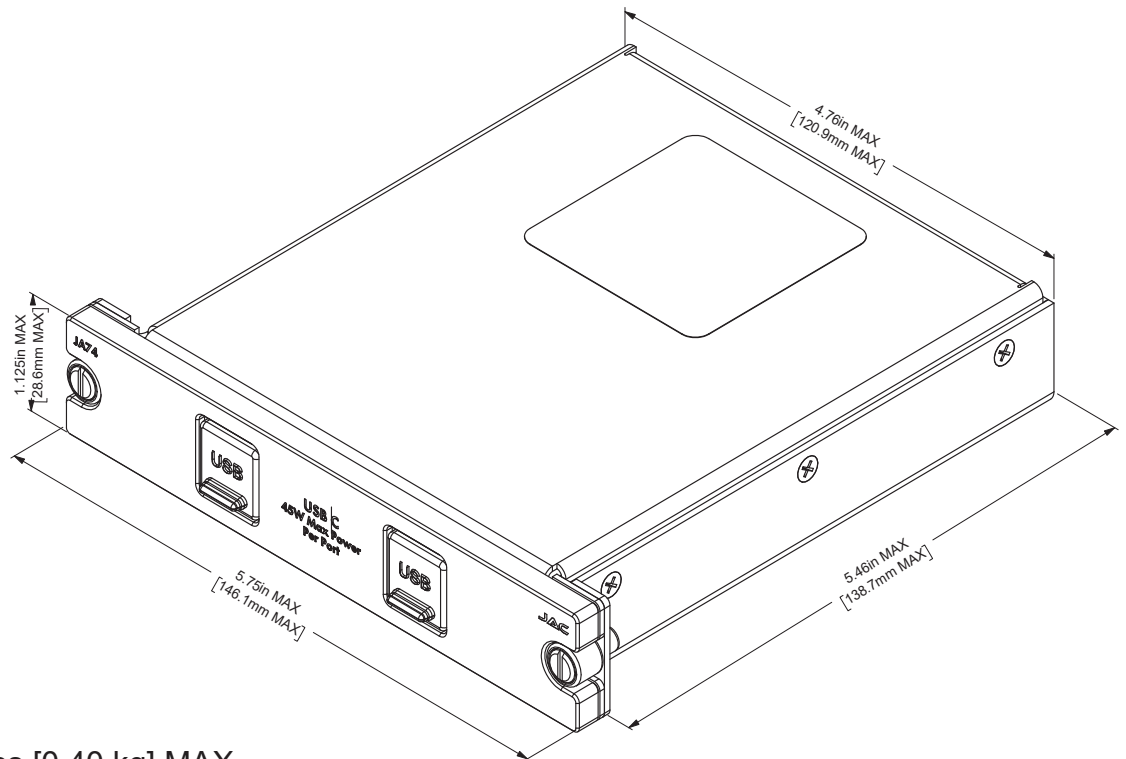

Weight: 0.89 lbs [0.40 kg] MAX.

Environment and Performance

| | |
|-----------------------|----------------------------|
| Input Current | 3.25 A Max @ 28 Vdc |
| Input Voltage Range | 20.5 to 32.2 Vdc |
| Operating Temperature | -45 °C to +70 °C |
| Survival Temperature | -55 °C to +85 °C |
| Altitude | 55,000 ft. max |
| TSO Compliance | Contact JAC for TSO status |

| | |
|------------------|-----------|
| Installation Kit | INST-JA74 |
|------------------|-----------|