




JUPITER AVIONICS
C O R P O R A T I O N

JA34-BT1
Universal Radio Adapter
With Bluetooth®

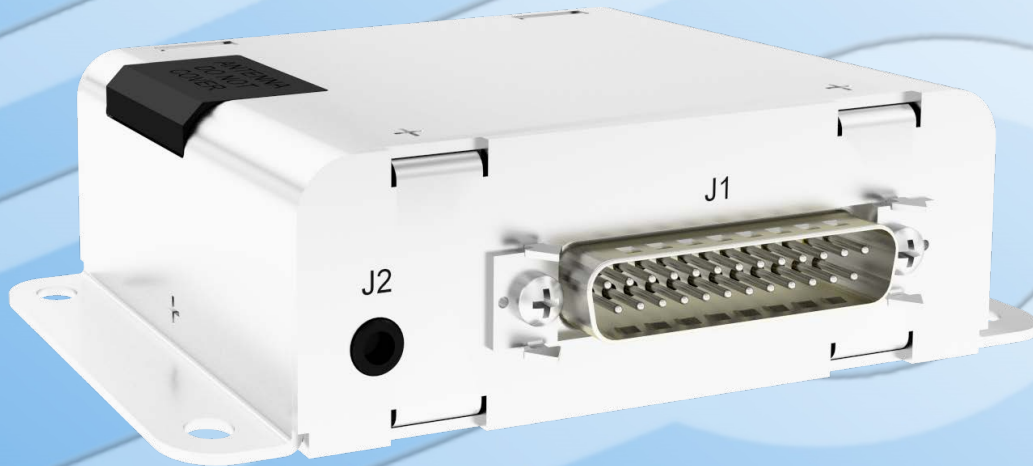

Installation and Operating Manual

Rev D

Jupiter Avionics Corporation
1959 Kirschner Road
Kelowna BC
Canada V1Y 4N7
Tel: +1 778 478 2232
Toll-Free: 1 855 478 2232
www.jupiteravionics.com

Copyright 2014 Jupiter Avionics Corp.

All rights reserved

Jupiter Avionics Corporation (JAC) permits a single copy of this manual to be printed or downloaded for the express use of an installing agency. Any such electronic or printed copy of this manual must contain the complete text of this copyright notice. Any unauthorized commercial distribution of this manual is strictly prohibited. Except as described above, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded, or stored in any storage medium for any purpose without the express prior written consent of JAC.

IMPORTANT:

Information in this document is subject to change without notice.
To confirm the current revision status of this manual, visit the JAC website:
www.jupiteravionics.com

[illegible]



Prepared:	Checked:	Approved:
MPB		



Table of Contents

SECTION 1 - DESCRIPTION	1
1.1 System Overview	1
1.2 Features Overview	1
1.3 Inputs and Outputs	1
1.3.1 Inputs	1
1.3.2 Outputs	1
1.4 Specifications	2
1.4.1 Electrical Specifications	2
1.4.2 Mechanical Specifications	3
1.4.3 Flammability of Materials	3
1.4.4 Product Configuration Version	3
1.4.5 FCC Compliance Statement	3
1.4.6 IC Compliance Statement	3
1.4.7 Co-location with Other Transmitters	3
SECTION 2 – INSTALLATION	4
2.1 Introduction	4
2.2 Continued Airworthiness	4
2.3 Unpacking and Inspecting Equipment	4
2.3.1 Warranty	4
2.4 Installation Procedures	4
2.4.1 Installation Limitations	4
2.4.2 Cabling and Wiring	4
2.4.3 Mechanical Installation	5
2.4.4 Post Installation Checks	5
2.5 System Operation	5
2.5.1 Configuration Operation	5
2.5.2 Receive Operation	6
2.5.3 Sidetone Operation	6
2.5.4 Relay Operation	6
2.5.5 Microphone Operation	6
2.6 Adjustments and Configuration using ProCS™	6
2.6.1 Configuration Cabling Requirements	6
2.6.2 ProCS™ Setup	6
2.6.3 Configurable Settings	7
2.6.4 JA34-BT1 Settings	7
2.6.5 Aircraft Audio Systems List	8
2.6.6 Non-Aircraft Radios List	9
2.6.7 JA34-BT1 Connector Maps	9
2.6.8 Other Configuration Features	9
2.7 Installation Kit	9
2.7.1 Recommended Crimp tools	9
2.8 Installation Drawings	9
SECTION 3 – OPERATION	10
3.1 Introduction	10
3.2 Bluetooth® Operation	10
3.3 Bluetooth® Pairing	10
3.4 Bluetooth® Status Indicator	11
Appendix A - Installation Drawings	A1
A1 Introduction	A1
A2 Installation Drawings	A1
Appendix B - Installation Documents	B1
B1 Airworthiness Approval	B2
B2 Instructions for Continued Airworthiness	B2

JA34-BT1 Universal Radio Adapter with Bluetooth®

SECTION 1 - DESCRIPTION

1.1 System Overview

The JA34-BT1 Universal Radio Adapter with Bluetooth® allows the aircraft audio management system access to a non-aviation radio and Bluetooth® enabled devices. The JA34-BT1 provides fully isolated audio signal paths to and from the radio to allow a noise free installation. Microphone biasing and artificial sidetone generation are selectable for radios without them.

The JA34-BT1 is setup on a per installation basis using a Configuration Cable and downloading the system configuration settings from a PC into non-volatile control devices.

1.2 Features Overview

The JA34-BT1 unit features an industry standard D-Sub connector pin-out to allow easy field upgrades.

All internal settings are quickly adjusted using the proprietary ProCS (Product Configuration Software).

Two configuration ports are provided for configuration loading, one beside the main connector and one on the rear.

All audio outputs are floating and balanced.

The JA34-BT1 provides relay contact keying, artificial sidetone generation and microphone voltage biasing.

The JA34-BT1 contains a Bluetooth® Audio Module and is a Bluetooth® class 3 device with a <10 meters operating range.

The JA34-BT1 is a Bluetooth® compliant device with the following supported profiles:

- HFP (Hands Free Profile) for cell phone interface.
- A2DP (Advanced Audio Distribution Profile) for music interface.

1.3 Inputs and Outputs

Refer to the JA34-BT1 [connector map](#) for the mating connector designators and contact assignments for the input and output signals.

1.3.1 Inputs

Name	Qty	Type
CONFIG DATA TO JA34-BT1	1	Data signal
MODE SELECT TO JA34-BT1	1	Discrete signal
RECEIVE INPUT	1	Audio signal
MIC INPUT	1	Audio signal
+28 VDC POWER	1	Power Supply
RELAY KEY INPUT	1	Discrete signal

1.3.2 Outputs

Name	Qty	Type
CONFIG DATA FROM JA34-BT1	1	Data signal
RECEIVE OUT	1	Audio signal
MIC OUTPUT	1	Audio signal
RELAY CONTACTS	6	Audio signal



1.4 Specifications

1.4.1 Electrical Specifications

Power Input

Nominal voltage	28 Vdc
Maximum voltage	30.3 Vdc
Minimum voltage	22.0 Vdc
Emergency voltage	18.0 Vdc
Input current	0.5 A max

1.4.1.1 Audio Performance

Rated Input Level

Receive input level	7.75 Vrms $\pm 10\%$
Microphone input level	250 mVrms $\pm 10\%$

Rated Output Level

Receive output	2.50 Vrms $\pm 10\%$
Microphone output (150 Ohm mode)	250 mVrms $\pm 10\%$
Microphone output (8 Ohm mode)	50 mVrms $\pm 10\%$

Audio Frequency Response

Receive output audio frequency response	$\leq 3\text{dB}$ from 300 to 6000 Hz
Microphone output audio frequency response	$\leq 3\text{dB}$ from 300 to 6000 Hz

Distortion Characteristics

Audio output distortion at rated power	$\leq 10\%$
--	-------------

Input Impedance

Microphone input impedance	150 $\Omega \pm 10\%$
Receive input impedance	600 $\Omega \pm 10\%$

Output Load

Receive load	600 $\Omega \pm 10\%$
Microphone load (150 Ohm mode)	150 $\Omega \pm 10\%$
Microphone load (8 Ohm mode)	8 $\Omega \pm 10\%$

Input to Input Crosstalk Level

Input to Input crosstalk	$\leq 60\text{ dB}$
--------------------------	---------------------

Audio Noise Level without Signal

Noise level below the rated output	$\geq 60\text{ dB}$
------------------------------------	---------------------

1.4.1.2 Audio Performance, Other

MIC input designed for MIC type	amplified dynamic/electret
MIC input bias voltage	12 Vdc $\pm 10\%$
MIC input circuitry type	differential or single ended
RECEIVE input circuitry type	Transformer Coupled
RECEIVE output circuitry type	Transformer Coupled
MIC output circuitry type	Transformer Coupled

1.4.1.3 Discrete Signals

RELAY KEY INPUT, active signal level	$\leq +3\text{ Vdc}$
RELAY KEY INPUT, inactive signal level	$\geq +10\text{ Vdc}$
Relay contacts shall pass	$\leq 1\text{ ADC @ } \leq 30\text{ V, Resistive Load}$



1.4.2 Mechanical Specifications

Height		1.27 in [32.3 mm] maximum
Depth		2.42 in [61.5 mm] maximum
Width		4.52 in [114.8 mm] maximum
Weight		0.43 lb [0.20 kg] maximum
Material		brushed aluminum with conversion coating
Connectors (3):	J2, J3 J1	Two 4 pole 3.5mm jack One 25-pin D-Sub male V5 locking
Mounting		4 x 10-32 fasteners
Bonding		≤ 2.5 mΩ
Installation kit part number		INST-JA34

1.4.3 Flammability of Materials

The JA34-BT1 complies with the requirements of RTCA/DO-160G Sec 26.3.3 "Flammability", through equivalent flammability testing of materials and the Small Parts Exemption.

1.4.4 Product Configuration Software Version

Configuration of the JA34-BT1 requires the Product Configuration Software (ProCS) version v0.16.4 or later. Refer to the release notes from <http://www.jupiteravionics.com/productsoftware.php> or contact Jupiter Avionics to ensure the correct version is used.

1.4.5 FCC Compliance Statement

Contains Transmitter Module FCC ID: QOQWT32AE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

1.4.6 IC Compliance Statement

Contains Transmitter Module Industry Canada ID: 5123A-BGTWT32AE

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme aux normes RSS sans licence d'Industrie Canada. Son fonctionnement est soumis aux conditions suivantes :

- (1) cet appareil ne doit pas causer d'interférences et
- (2) doit accepter toute interférence, y compris les interférences pouvant entraîner un fonctionnement indésirable de l'appareil.

1.4.7 Co-location with Other Transmitters

Ensure all JA34-BT1 units are installed with at least 20 cm between other JA34-BT1 units and antennae from other transmitting equipment.

JA34-BT1 Universal Radio Adapter with Bluetooth®

SECTION 2 – INSTALLATION

2.1 Introduction

This section contains unpacking and inspection procedures, installation information, and post-installation checks.

2.2 Continued Airworthiness

Maintenance of the JA34-BT1 is on condition only. Scheduled inspection and/or periodic maintenance of this unit is not required.

2.3 Unpacking and Inspecting Equipment

Unpack the equipment carefully. Check for shipping damage and report any problems to the relevant carrier. Confirm that the Authorized Release Certificate or Certificate of Conformance is included. Complete the on-line warranty card from the Jupiter Avionics Corporation (JAC) website - www.jupiteravionics.com/warranty

2.3.1 Warranty

This product manufactured by JAC is warranted to be free of defects in workmanship or performance for 2 years from the date of installation by an approved JAC dealer or agency. This warranty covers the cost of all materials and labour to repair or replace the unit, but does not include the cost of transporting the defective unit to and from JAC or its designated warranty repair centre, or of removing and replacing the defective unit in the aircraft. This warranty does not cover failures due to abuse, misuse, accident, or unauthorized alteration or repairs.

THIS WARRANTY IS VOID IF THE PRODUCT IS NOT INSTALLED BY AN AUTHORIZED JAC DEALER. If the on-line warranty card is not completed, the product will be warranted from the date of manufacture.

Contact JAC for return authorization, and for any questions regarding this warranty and how it applies to your unit(s). JAC is the final arbiter concerning warranty issues.

2.4 Installation Procedures



WARNING: Loud noise can cause hearing damage. Set the headset volume to minimum before conducting tests, and slowly increase the volume to a comfortable listening level.



CAUTION: The power input circuitry of the unit may be damaged if the installation does not conform to the wiring instructions in this manual.

2.4.1 Installation Limitations

The JA34-BT1 may be installed only by following the applicable airworthiness requirements.

2.4.2 Cabling and Wiring

All wire shall be selected in accordance with the original aircraft manufacturer's maintenance instructions, or AC43.13-1B Change 1, Paragraphs 11-76 through 11-78. Unshielded wire types shall qualify to MIL-W-22759 as specified in AC43.13-1B Change 1, Paragraphs 11-85, 11-86, and listed in Table 11-11. For shielded wire applications, use Tefzel MIL-C-27500 shielded wire with tag ring or equivalent (for shield terminations) to make the most compact and easily terminated interconnect. Follow the Connector Map in [Appendix A](#) of this manual.



Allow 3" from the end of the shielded wiring to the shield termination to allow the connector hood to be easily installed. Refer to the Interconnect drawing in Appendix A of this manual for shield termination details. Note that this unit has a 'clamshell' hood that is installed after the wiring is complete.

Maintain wire segregation and route wiring in accordance with the original aircraft manufacturer's maintenance instructions.

Unless otherwise noted, all wiring shall be a minimum of 24 AWG, except power and ground lines, which shall be a minimum of 22 AWG. Refer to the Interconnect drawing for additional specifications. Check that the ground connection is clean and well secured, and that it shares no path with any electrically noisy aircraft accessories such as blowers, turn-and-bank instruments, or similar loads.

2.4.3 Mechanical Installation

The JA34-BT1 can be mounted in any attitude and location with adequate space and sufficient clearance for the connector and wiring harness. It requires no direct cooling. Ensure all JA34-BT1 units are installed with at least 20 cm between other JA34-BT1 units and antennae from other transmitting equipment.

2.4.4 Post Installation Checks

2.4.4.1 Voltage/Resistance checks.

Do not attach this unit until the following conditions are met:

- a) Check P1 pin **1** for +28 Vdc power.
- b) Check P1 pin **14** (Power Ground) for continuity to ground (less than 0.5 Ω).
- c) Check P1 pin **15** (Chassis Ground) for continuity to ground (less than 0.5 Ω).
- d) Check all pins for shorts to ground or adjacent pins.

2.4.4.2 Configuration

Ensure that the JA34-BT1 contains the correct configuration settings. This may be done at the factory, on the maintenance bench or in the aircraft before the power on checks are performed. Refer to section 2.5.

2.4.4.3 Power on Checks.

Power up the aircraft's systems and confirm normal operation of all functions of the JA34-BT1 (see section 2.5).

- a) Confirm radio operation for both receive and transmit. Do not proceed until the radio is functioning correctly.
- b) Unusual buzzes, hums or other background audio are symptomatic of multiple grounds, or noisy external systems such as blowers or pumps sharing wiring with the audio system. If a transmitter fails to key or correctly modulate it is often the result of not connecting all required grounds to the radio or external audio system.
- c) Check that all configurations settings are correct.


When all performance checks are satisfied, complete the necessary regulatory documentation before releasing the aircraft for service. Refer to [Appendix B](#).

2.5 System Operation

The JA34-BT1 is a remote mount unit and has no user accessible controls.

2.5.1 Configuration Operation

The JA34-BT1 accepts commands on the Configuration connector via the configuration cable and the configuration tool ProCs™. (See [section 2.6](#) Adjustments and Configuration)



2.5.2 Receive Operation

The RECEIVE INPUT is level controlled and summed with the MIC INPUT (Sidetone) and routed to the RECEIVE OUTPUT.

When Bluetooth® operation is enabled, the Bluetooth® received audio is level controlled and routed to the RECEIVE OUTPUT.

2.5.3 Sidetone Operation

The MIC INPUT audio is level controlled (sidetone level) and routed to the RECEIVE OUTPUT.

2.5.4 Relay Operation

When the RELAY KEY INPUT is inactive, the RELAY COMMON contacts are connected to the RELAY N.C. contacts.

When the RELAY KEY INPUT is active (connected to POWER GROUND), the RELAY COMMON contacts are connected to the RELAY N.O. contacts.

2.5.5 Microphone Operation

The MIC INPUT audio is level controlled and routed to the MIC OUTPUT.

When Bluetooth® operation is enabled and the Hands Free Profile (HFP) is selected, the MIC INPUT audio is level controlled and routed to the Bluetooth® transmit audio.

2.6 Adjustments and Configuration using ProCS™

All the JA34-BT1 internal adjustments are set from the [Product Configuration Software ProCS™](#). Configuration data is sent to the JA34-BT1 via the front panel connector (J10), using the Configuration Cables and a computer running the ProCS™ software. For configuration requirements, see [section 2.5.1](#).

For full information on the configuration process, and for installation of ProCS™ on your computer, refer to the [ProCS™ manual](#) on the Jupiter Avionics website - www.jupiteravionics.com/productsoftware.

2.6.1 Configuration Cabling Requirements

To configure the JA34-BT1, it is necessary to load the [Product Configuration Software ProCS™](#) onto a Windows-based computer as described in the [ProCS™ manual](#).

The cables required to configure the JA34-BT1 are not included with the unit.

Cabling option 1:

<u>Quantity</u>	<u>Description</u>	<u>JAC Part #</u>
1	USB A to RS232 9-Pin Cable	CAB-USB-0002
1	Configuration Cable	JA99-001

Cabling option 2:

<u>Quantity</u>	<u>Description</u>	<u>JAC Part #</u>
1	USB A Male to RS232 3.5mm Plug	CAB-USB-0006

2.6.2 ProCS™ Setup



The JA34-BT1 menu items 'ProCS Setup' provide drawings showing the cabling arrangement (using JA99 or CAB-USB-0006) for connecting the JA34-BT1 to a computer to allow configuration using ProCS™.



2.6.3 Configurable Settings

A standard unit is shipped from the factory with all internal adjustments configured to the default levels. At installation, it may be desirable to change some of these settings to suit the local operating environment.



Note: To configure the JA34-BT1, power must be applied to the unit.

Within ProCS™, the configurable settings are grouped together into the following sections:


2.6.4 JA34-BT1 Settings

The **Settings** window is divided into three sections: the Aircraft Audio System; the Universal Radio Adapter; and the Non-Aircraft Radio. Each section is colour-coded to keep the relevant information together.

The **Settings** window is divided into five sections:


- the Aircraft Audio System
- the JA34-BT1 Universal Radio Adapter Adjustments
- the Bluetooth® Transceiver
- the Non-Aircraft Radio Selection.

Each section is colour-coded to keep the relevant information together.

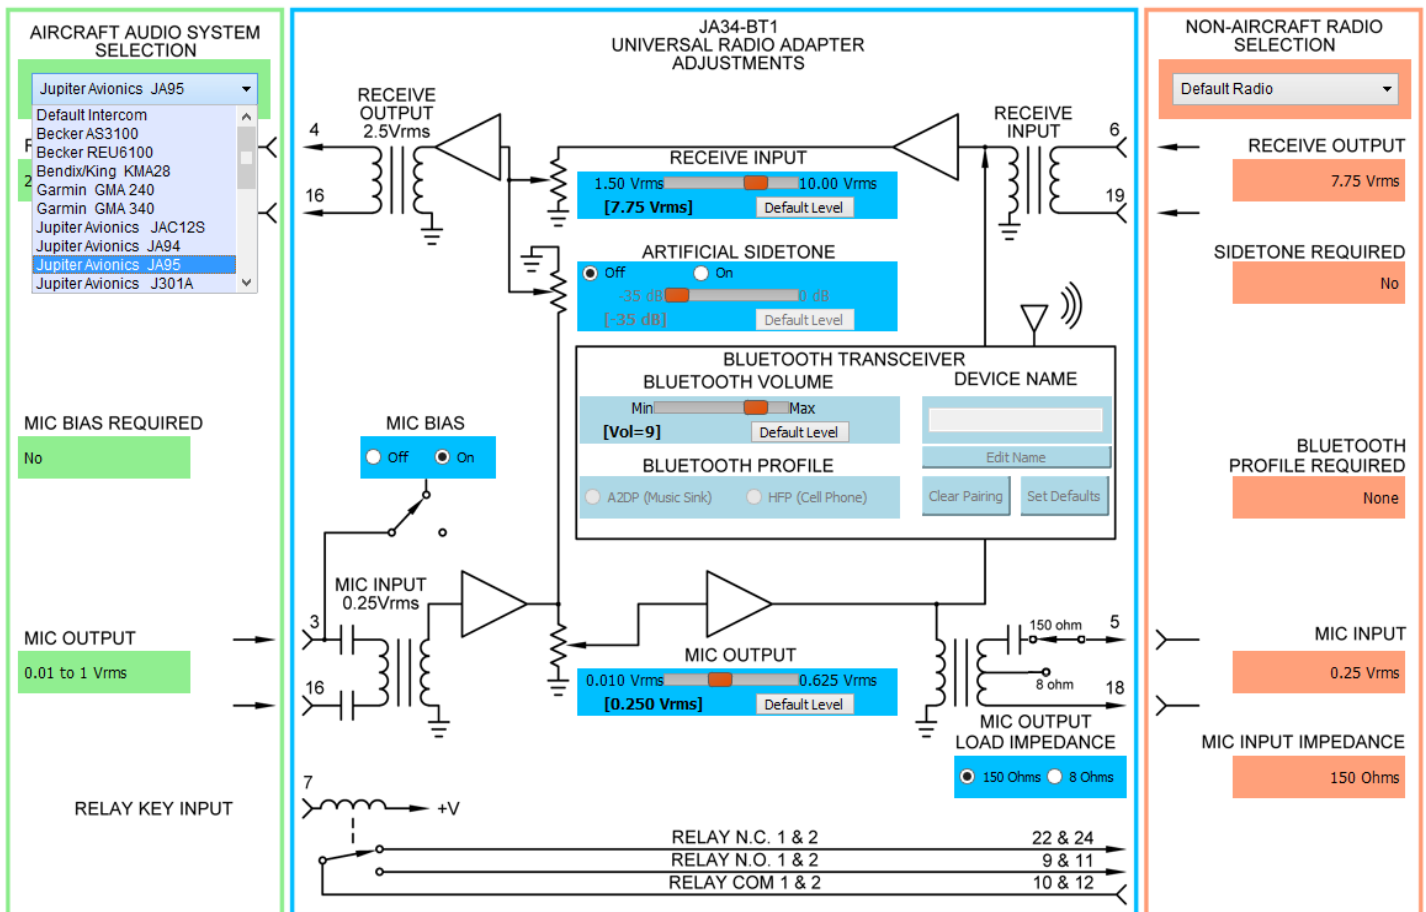

2.6.4.1 Aircraft Audio System Selection (Green block)

The appropriate aircraft audio system is selected from a drop-down list at the top of the block, and all relevant configuration information is added automatically. Other aircraft Audio systems can be added to the list (see [section 2.6.5](#)).



2.6.4.2 JA34-BT1 Universal Radio Adapter Adjustments (Blue block)

The blue block refers to the adjustments and settings for the JA34-BT1 Universal Radio Adapter.

Receive Input

The level of the RECEIVE INPUT may be adjusted from 1.50 to 10.00 Vrms. (Default **7.75 Vrms**)

Artificial Sidetone

The Artificial Sidetone may be selected as ON or OFF. When selected ON, the level of the MIC INPUT sidetone may be adjusted from -12 to 0 dB. (Default **-10 dB**) (When OFF, the level is -35 dB)

Mic Bias

The MIC Bias may be ON or OFF. (Default **ON**)

Mic Output

The level of the MIC OUTPUT signal may be adjusted from 0.010 to 0.625 Vrms. (Default **0.250mVrms**)

Mic Output Load Impedance

The MIC OUTPUT impedance may be set to 8 Ohms or 150 Ohms. (Default **150 Ohms**)

Bluetooth® Transceiver

A custom Bluetooth® device name identifies the JA34-BT1 in the user's cell phone. The volume can be set to suit the user's preference.

The Bluetooth® Profile is configured to provide both A2DP (Advanced Audio Distribution Profile) for playing audio from a smartphone or other music source, and HFP (Hands Free Profile) for connecting to a cell phone.

If a device is attached, the 'Edit Name', 'Clear Pairing' and 'Set Defaults' buttons will be available for use.

2.6.4.3 Non-Aircraft Radio Selection (Orange block)

The appropriate Non-Aircraft Radio is selected from a drop-down list at the top of the block, and all relevant configuration information is added automatically. Other Non-Aircraft Radios can be added to the list (see [section 2.6.6](#)).

2.6.5 Aircraft Audio Systems List

This is a list of Aircraft Audio Systems, and shows the configuration information that will be added to the **JA34-BT1 Settings** page.

Aircraft Audio Systems List										
<div> <div>+</div> <div>-</div> <div>✓</div> <div>✗</div> </div>										
Company	Model	Phones Output	s Output Desc	MIC Input	MIC Input Description	Receive Input	ive Input Descr	MIC Output	Output Descr	MIC Bias Required
Default Intercom		4.50 Vrms		0.300 Vrms	300mVrms into 150 Ohms	Vrms	2.5 to 20 Vrms	0.30 Vrms	0.30 Vrms	No
Becker	AS3100	11.00 Vrms	400mW (11...	0.200 Vrms	200mVrms into 150 Ohms	Vrms	6 Vrms	0.15 Vrms	0.15 Vrms	No
Becker	REU6100	8.66 Vrms	250mW (8.6...	0.250 Vrms	250mVrms into 150 Ohms	Vrms	2.5 to 20 Vrms	0.50 Vrms	0.07 to 1.5 Vrms	No
PS Engineering	PMA8000B	Vrms	38mW (2.25...	0.250 Vrms	250mVrms into 150 Ohms	Vrms	2.5 Vrms	Vrms	0.25 Vrms	Yes
Technisonic	A710	Vrms	332mW (7V...	0.150 Vrms	150mVrms into 150 Ohms	Vrms	2.5 Vrms	Vrms	0.25 Vrms	Yes
Technisonic	A711	Vrms	332mW (7V...	0.150 Vrms	150mVrms into 150 Ohms	Vrms	2.5 Vrms	Vrms	0.25 Vrms	Yes
Technisonic	A711L	Vrms	332mW (7V...	0.150 Vrms	150mVrms into 150 Ohms	Vrms	2.5 Vrms	Vrms	0.25 Vrms	Yes
Company	New Model	Vrms		Vrms		Vrms		Vrms		No

If it is desirable to add other Audio systems, click on the **Aircraft Audio Systems List**. A new audio system and its parameters can be added by clicking on (the 'New Aircraft Audio System' button). A new line will be added to the bottom of the list, and double clicking on each part of the line will highlight it to allow changes. When the relevant details have been added, use the ('Save Changes') or ('Cancel All Changes') button as required. The added system will then appear on the appropriate drop-down menu list.



2.6.6 Non-Aircraft Radios List

This is a list of Non-Aircraft Radios and the configuration information that will be added to the **JA34-BT1 Settings** page. The list is similar to the Aircraft Audio Systems list, and new radios can be added in the same way.

2.6.7 JA34-BT1 Connector Maps

JA34-BT1 Connector Maps and Interconnects are included here for information only.

2.6.8 Other Configuration Features

In the JA34-BT1 Product Information Window, the model number, serial number and check sum of the JA34-BT1 Universal Radio Adapter with Bluetooth® can be viewed.

2.7 Installation Kit

The kit required to install this unit is not included with the unit.

The installation kit (Part # INST-JA34) consists of the following:

Quantity	Description	JAC Part #
1	TAG ring	CON-5500-0625
1	D-Sub 25-pin connector, hood and 25 crimp pins	CON-3420-0025
1	Heat Shrink Tubing	WIR-HTSK-1000

2.7.1 Recommended Crimp tools

Standard D-Sub Crimp Tool Chart			
Tool Type	Hand crimping tool	Positioner	Insertion/extractor tool
POSITRONIC	9507-0-0-0	9502-5-0-0	4711-2-0-0
DANIELS	AFM 8	K13-1	91067-2
MIL-SPEC	M22520/2-01	M22520/2-08	M81969/1-02

2.8 Installation Drawings

The drawings and documents required for Installation can be found in [Appendix A](#) of this manual.

JA34-BT1 Universal Radio Adapter with Bluetooth®

SECTION 3 – OPERATION

3.1 Introduction

The JA34-BT1 Universal Radio Adapter with Bluetooth® allows the aircraft audio management system access to a non-aviation radio and Bluetooth® enabled devices.

3.2 Bluetooth® Operation

The JA34-BT1 is a remote mount unit and has no user accessible controls. However, when a Bluetooth® enabled device such as a cell phone is introduced into the aircraft, it can be paired with the JA34-BT1.

The Bluetooth® transceiver can be configured at installation or in the field by a dealer or installer, using the Jupiter Avionics Corporation ProCS™ configuration software. At that time, the Bluetooth® volume and the device name can be chosen.

The default Bluetooth® device name is **JA34-BT1-xxxx** where xxxx is the unit's serial number.

3.3 Bluetooth® Pairing



Pairing is initiated using your cellphone or other Bluetooth® enabled device. Refer to your cellphone operating manual for full pairing information.

Typically, from the phone 'Settings' screen, select 'Bluetooth' and ensure that it is turned on. Then confirm that the list of discoverable devices includes **JA34-BT1** or the selected device name. Select this device.

The cellphone will pair with the JA34-BT1 in the mode selected via ProCS™ - HFP (Hands-Free Profile), SPP (Serial Port Profile) - A2DP Sink - A2DP Source. If necessary, confirm the mode with the installer.



Note: Some cell phones may not support A2DP audio streaming. Refer to your cellphone manual for more information.



Note: If the Bluetooth® mode of the JA34-BT1 is changed at a later date, it may be necessary to un-pair the cellphone and repeat the pairing process to reset to the updated mode of operation.



3.3.1 iPhone Connectivity Configuration

The default setting for Call Audio Routing allows the iPhone to select where to route calls; either to the built-in speaker or a Bluetooth® headset. This can cause response delays and possible 'dropped calls'.

To ensure that the paired iPhone works more consistently, it should be configured to use the Bluetooth® device as a default when answering incoming calls.

Example from the iPhone 5:

- Select **Settings**
- Select **Accessibility**
- Select **Call Audio Routing**
- Choose **Headset**

Example from the iPhone 6:

- Select **Settings**
- Select **General**
- Select **Accessibility**
- Select **Call Audio Routing**
- Choose **Headset**



Changing the setting to **Headset** ensures that the iPhone selects the Bluetooth® device as its first option, but will revert to the iPhone's built-in speaker if no device is found.

3.4 Bluetooth® Status Indicator

If an optional Bluetooth® Status Indicator is installed, the table below describes how an indicator lamp will behave at various stages of the connection process.

Light	Bluetooth® Connection Status
Flashing	Waiting for connection
Steady	Connected
Off	Bluetooth® off

Installation and Operating Manual

Appendix A - Installation Drawings


A1 Introduction

The drawings necessary for installation and troubleshooting of the JA34-BT1 Universal Radio Adapter with Bluetooth are in this Appendix, as listed below.

A2 Installation Drawings

DOCUMENT	Rev
JA34-BT1 Connector Map	A
JA34-BT1 Interconnect	C
JA34-BT1 Mechanical Installation	C

P1
25 PIN FEMALE DMIN
MATING CONNECTOR

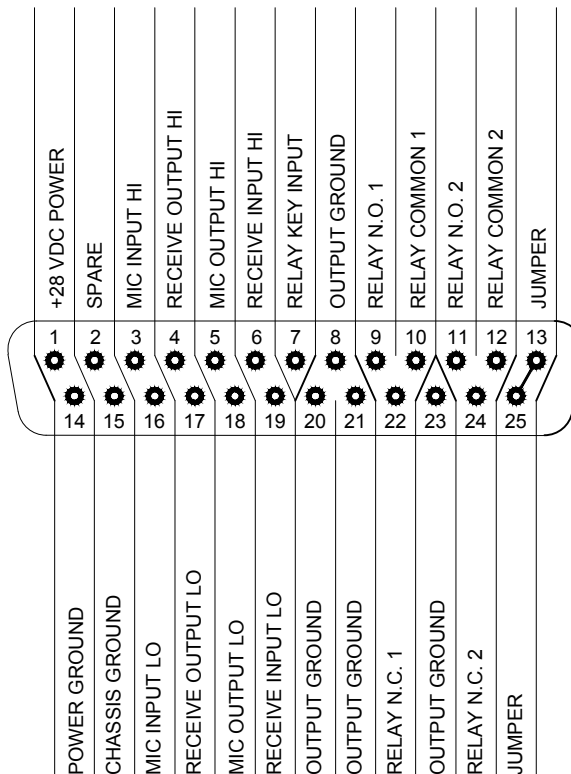


VIEW IS FROM REAR OF MATING CONNECTOR

CONFIGURATION CONNECTOR

P2-P3

JA99 CONFIGURATION CABLE
4 POLE MALE 3.5MM STEREO






MATING PLUG NAMES

JA34 SIGNAL NAMES

TIP: TX DATA
1ST RING: RX DATA
2ND RING: GROUND
3RD RING: MODE SELECT




CONFIG DATA TO JA34
CONFIG DATA FROM JA34
GROUND
MODE SELECT


PREPARED	TAT	 JUPITER AVIONICS CORPORATION		
CHECKED	 JAC 04-23-14 DS			
APPROVED	 JAC 04-23-14 KDV	TITLE Universal Radio Adapter With Bluetooth		
CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP.		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 1/1
		DOC NO. JA34-BT1 Connector Map Rev A.dwg		




JA34-BT1 INTERCONNECT WIRING NOTES

NOTES


1. All wire size should be 24 AWG min unless otherwise specified. Unshielded wire should be selected per FAA AC43.13-1B change 1 para 11-76 TO 11-78. Wire types should be in accordance with MIL-W-22759 as described in FAA AC43.13-1B change 1 para 11-85 and 11-86 and listed in table 11-11 or 11-12. All shielded cable should be in accordance with MIL-DTL-27500 (Revision H or later).
2. Jumper for a ground to key radio.
3. Jumper for a floating contact closure.
4. Input/Outputs are transformer coupled (Balanced), 'LO' wires require one termination to ground (usually at the source).
5. Connection to airframe ground should be made with 20 AWG wire. Length not to exceed 3 FT (0.9 M).
6. Cable shields at the JA34-BT1 connector pins should be terminated to airframe ground using a tag ring P/N: MS27741-3 or equivalent.
7. Optional resistors for routing music to audio controller.
8. Optional switch to disable transceiver PTT during phone call.

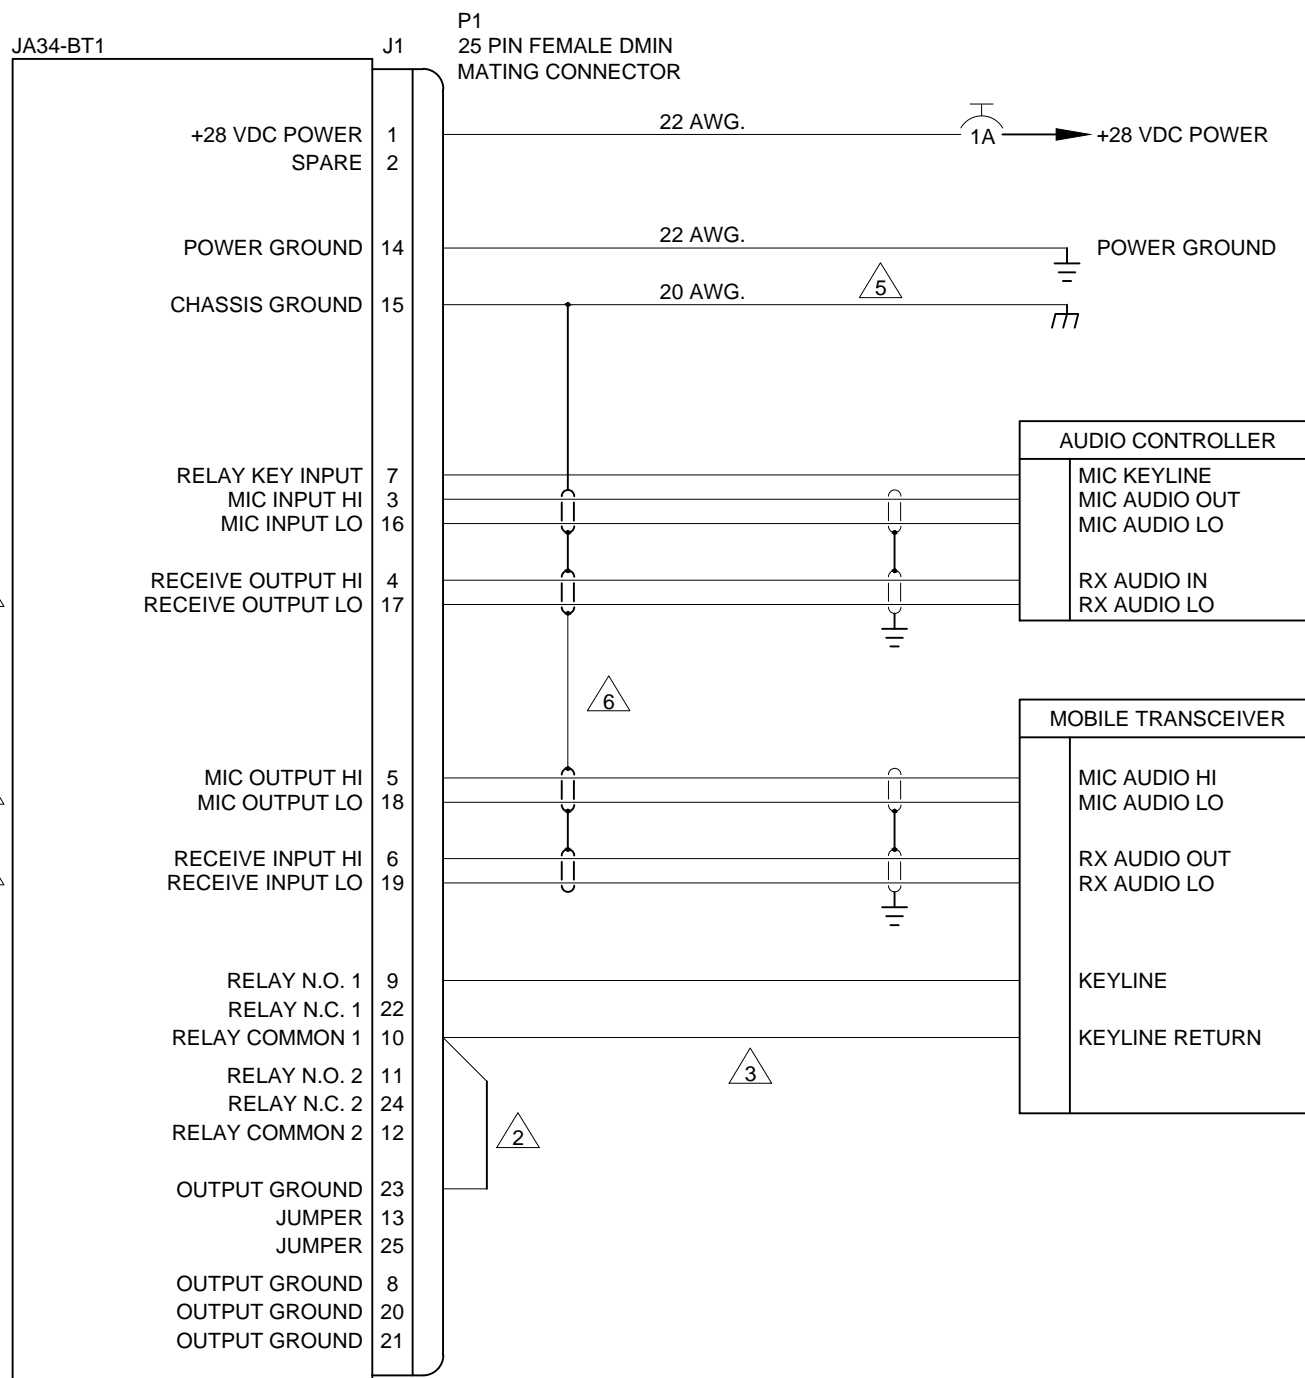


PREPARED	TAT 	 JUPITER AVIONICS CORPORATION		
CHECKED		TITLE Universal Radio Adapter With Bluetooth		
APPROVED		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 1/6
CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP.		DOC NO. JA34-BT1 Interconnect Rev C.dwg		




PREPARED	TAT	 JUPITER AVIONICS CORPORATION		
CHECKED				
APPROVED		TITLE Universal Radio Adapter With Bluetooth		
CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP.		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 2/6
		DOC NO. JA34-BT1 Interconnect Rev C.dwg		

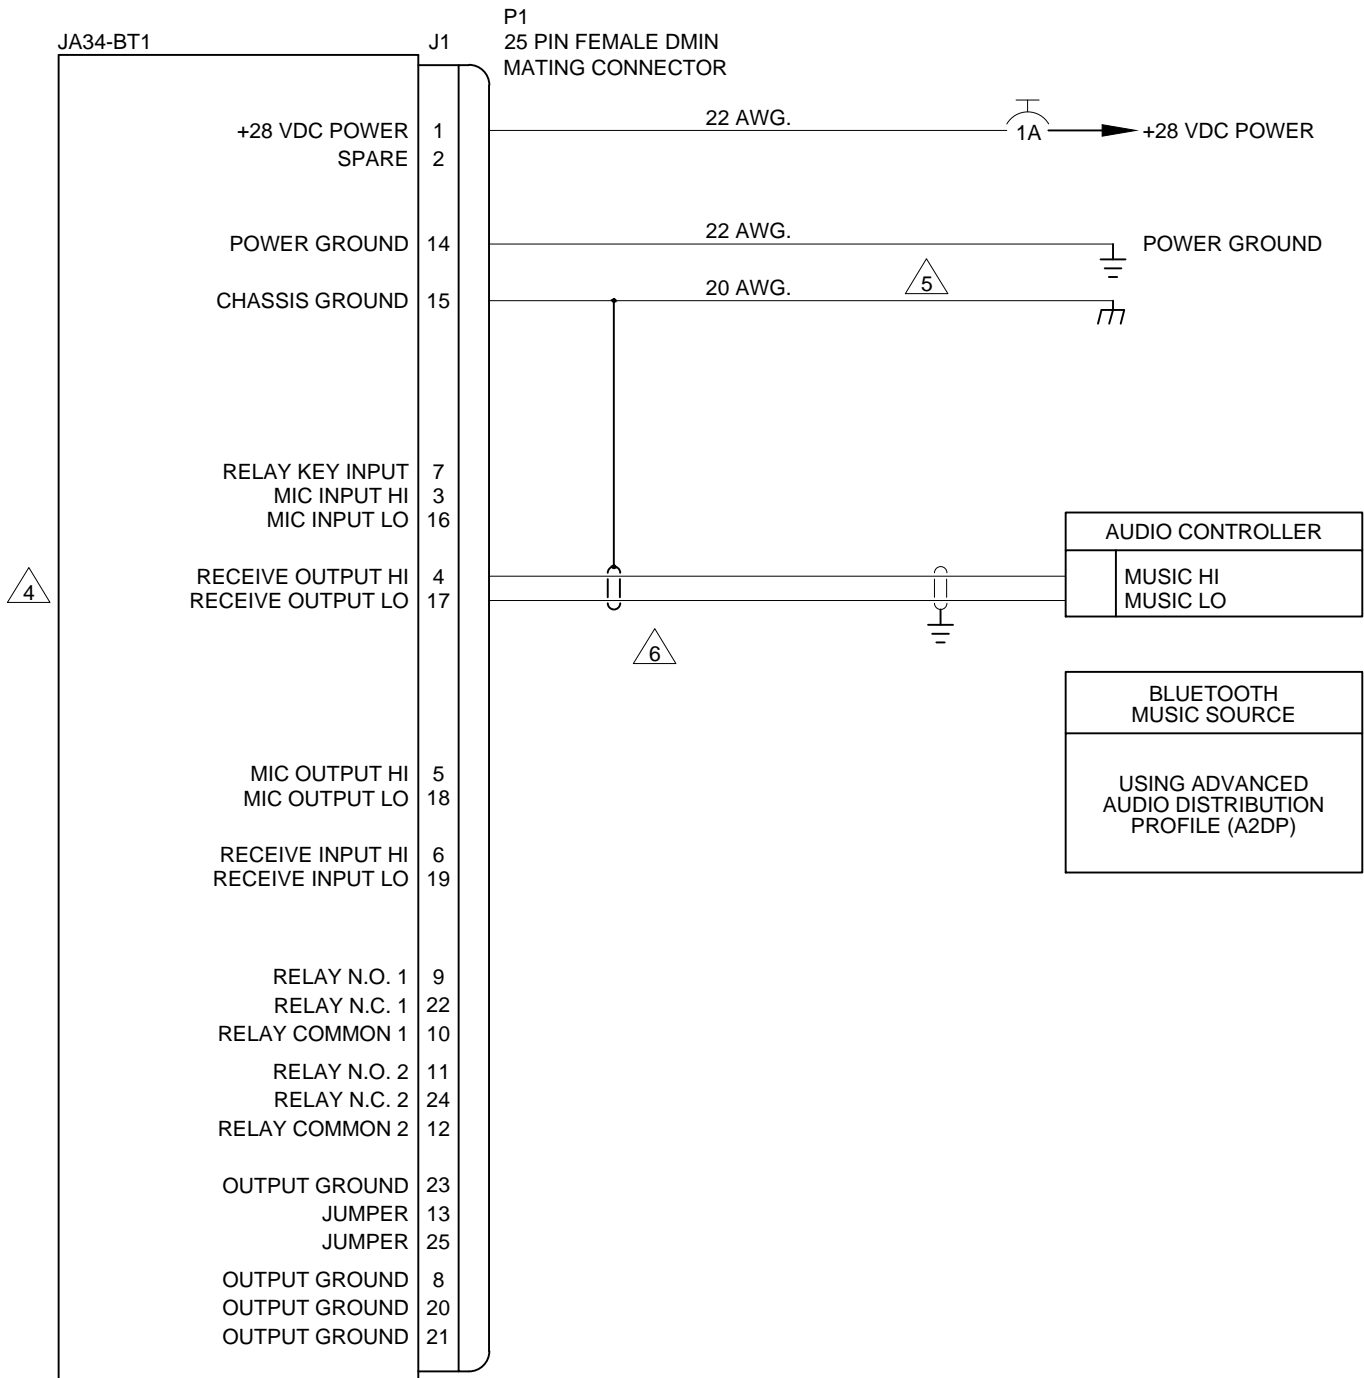


OPTIONAL: BLUETOOTH MUSIC INPUT



PREPARED	TAT	 JUPITER AVIONICS CORPORATION		
CHECKED				
APPROVED		TITLE Universal Radio Adapter With Bluetooth		
CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP.		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 3/6
		DOC NO. JA34-BT1 Interconnect Rev C.dwg		

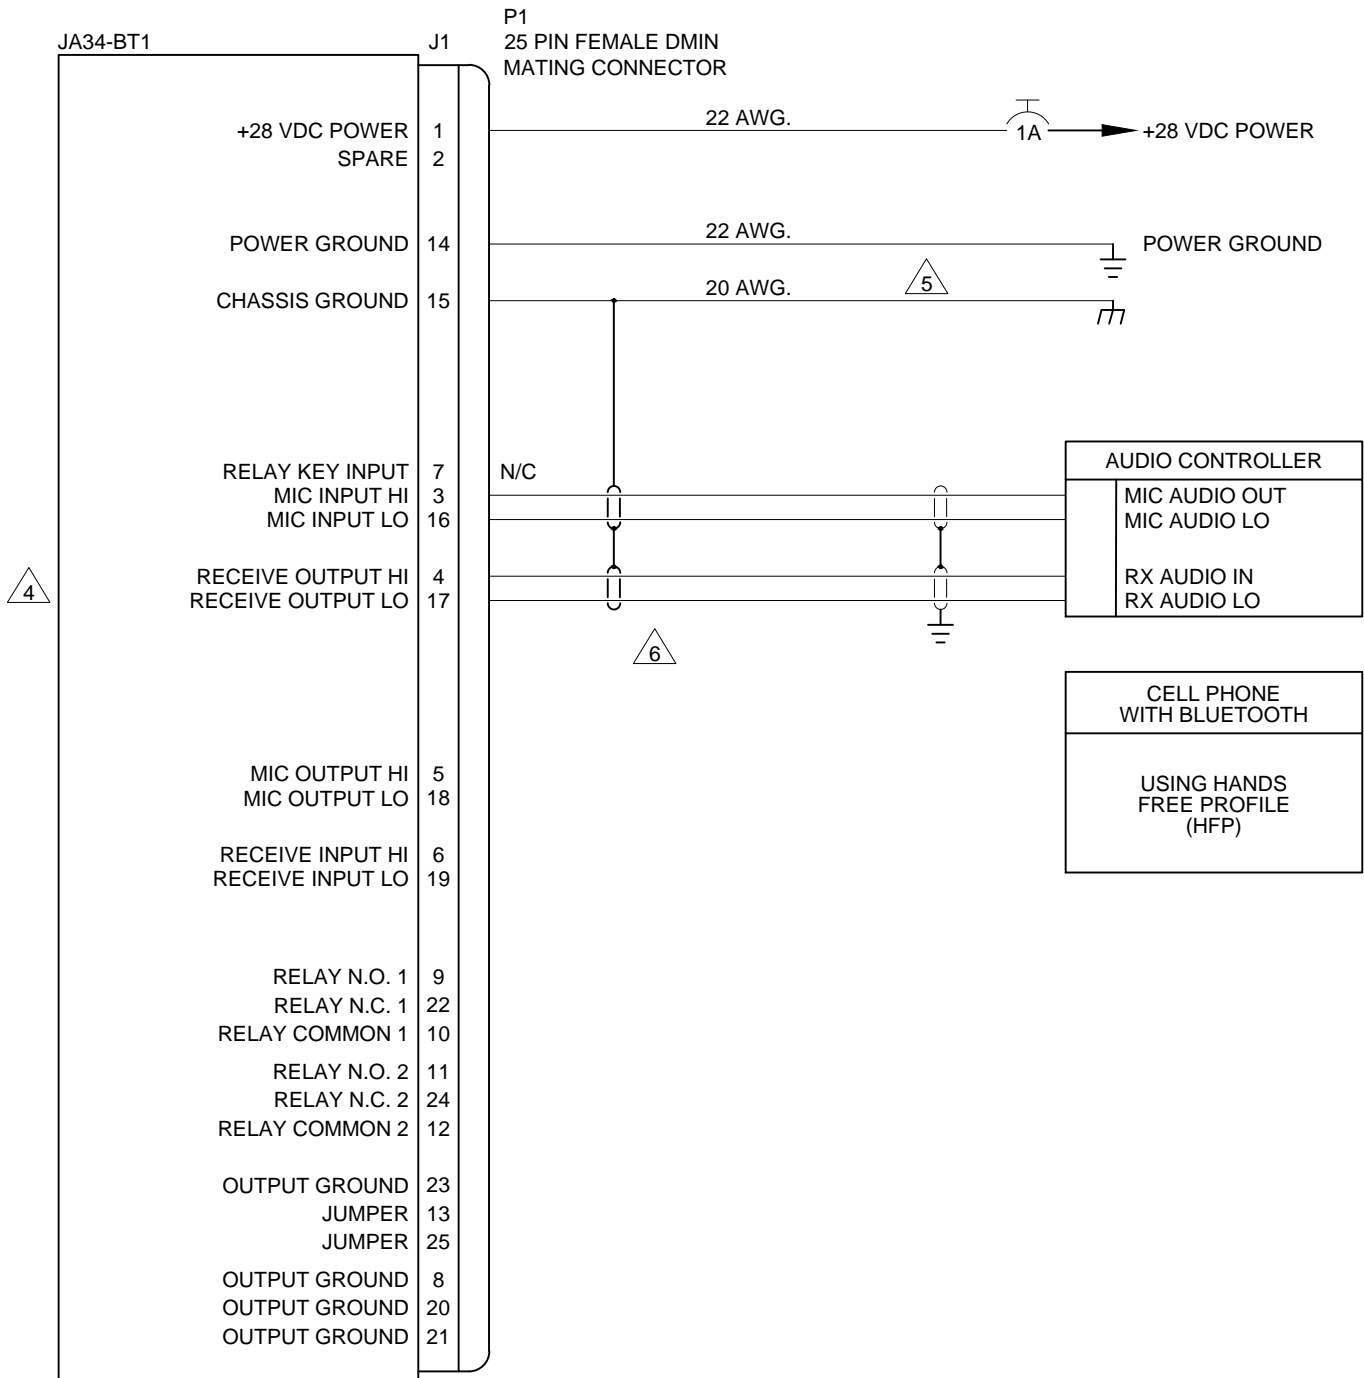
OPTIONAL: BLUETOOTH CELL PHONE




PREPARED	TAT	 JUPITER AVIONICS CORPORATION		
CHECKED				
APPROVED		TITLE Universal Radio Adapter With Bluetooth		
CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP.		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 4/6
		DOC NO. JA34-BT1 Interconnect Rev C.dwg		


CONFIGURATION CONNECTOR


JA34-BT1 CONFIGURATION CONNECTOR

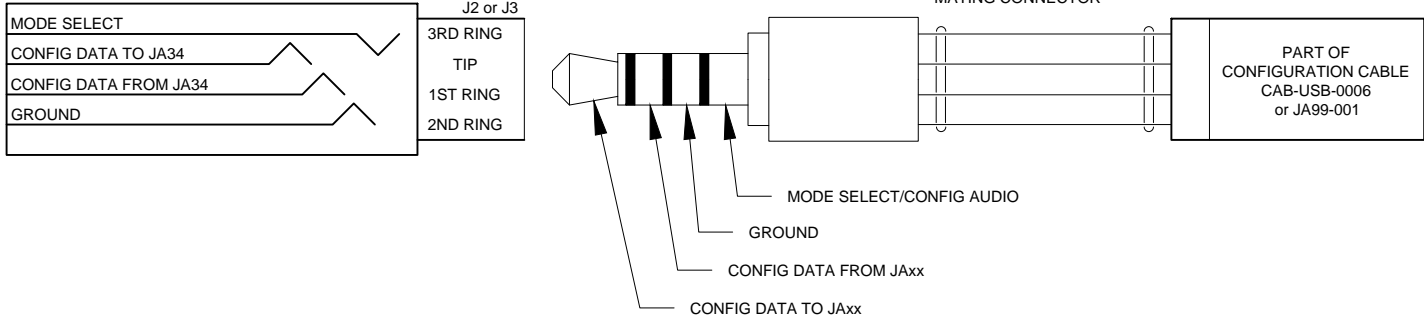



PREPARED	TAT			
CHECKED	JAC 02-13-19 SRM			
APPROVED	JAC 02-13-19 KDV	TITLE Universal Radio Adapter With Bluetooth J2 and J3 Interconnect		
CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP.		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 5/6
		DOC NO. JA34-BT1 Interconnect Rev C.dwg		

OPTION: JA34-BT1 Interconnect to a Transceiver and a Mobile Phone with music.

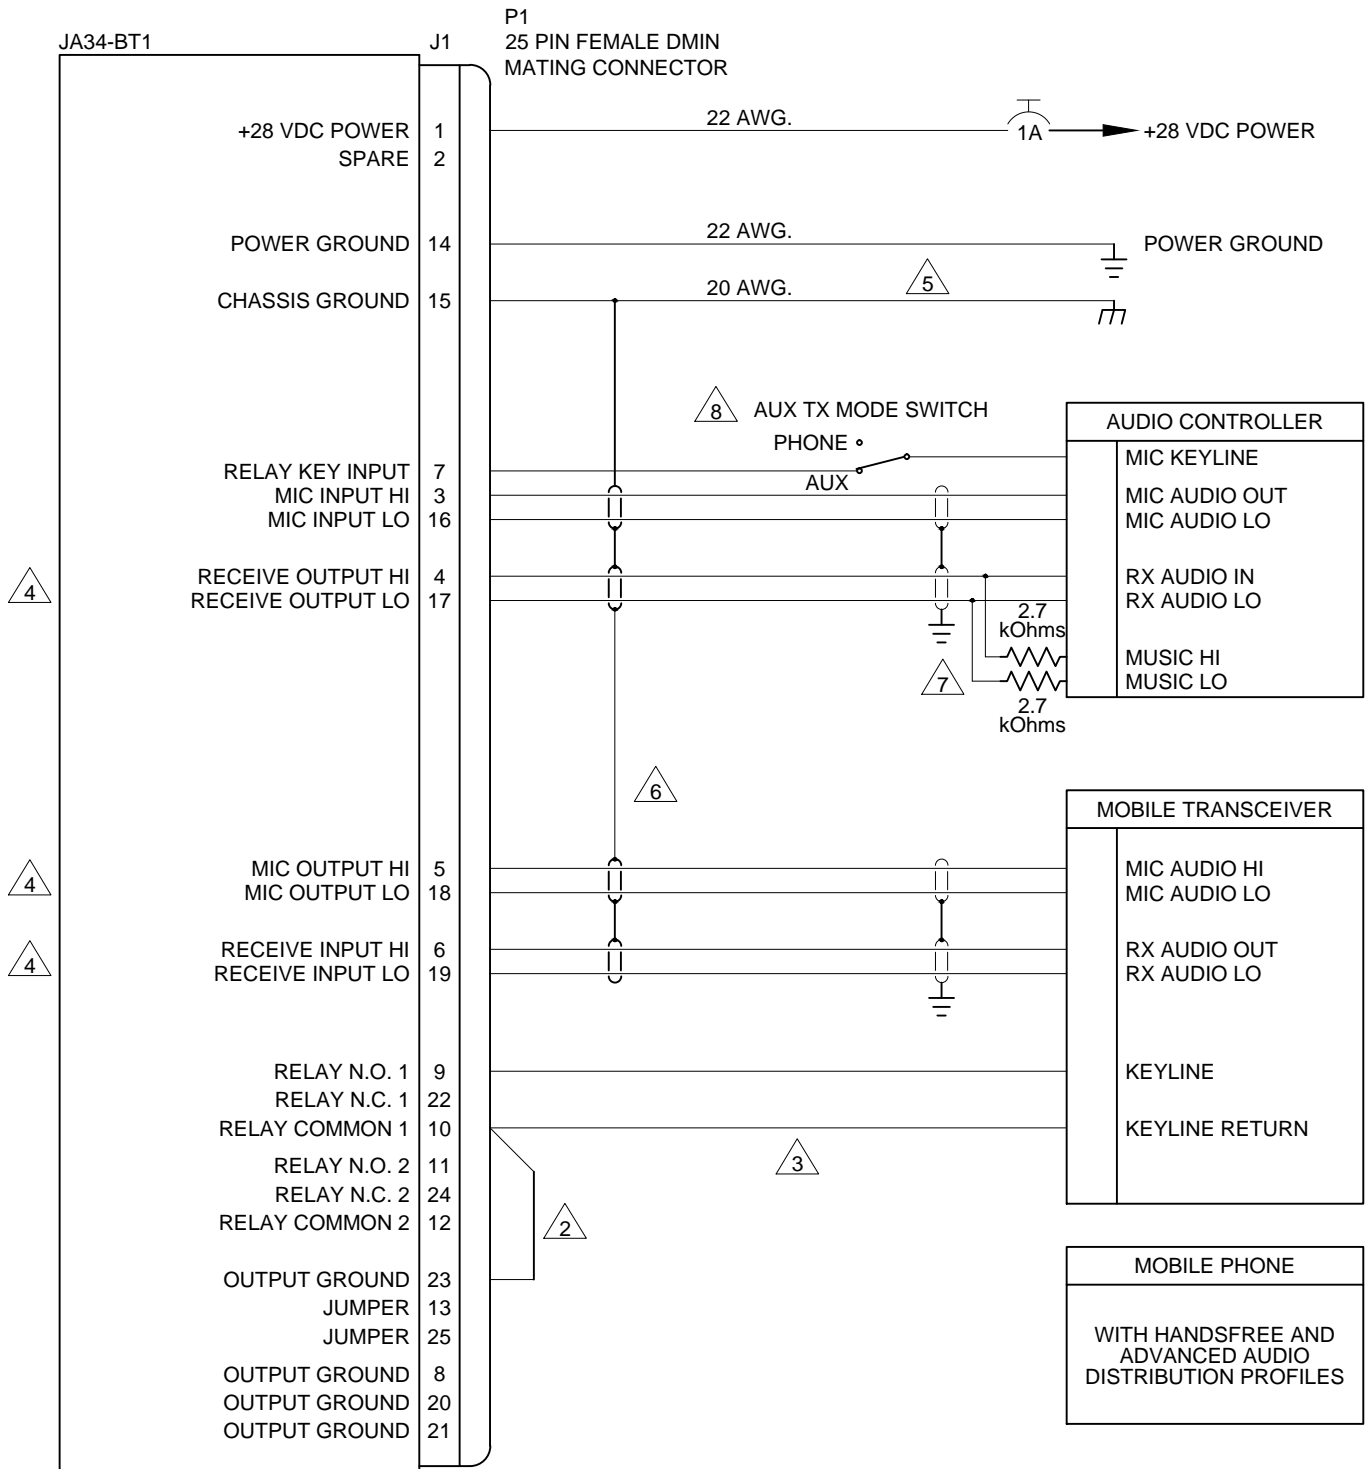



PREPARED	TAT			
CHECKED	JAC 02-13-19 SRM			
APPROVED	JAC 02-13-19 KDV	Universal Radio Adapter With Bluetooth		
CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP.		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 6/6
		DOC NO. JA34-BT1 Interconnect Rev C.dwg		

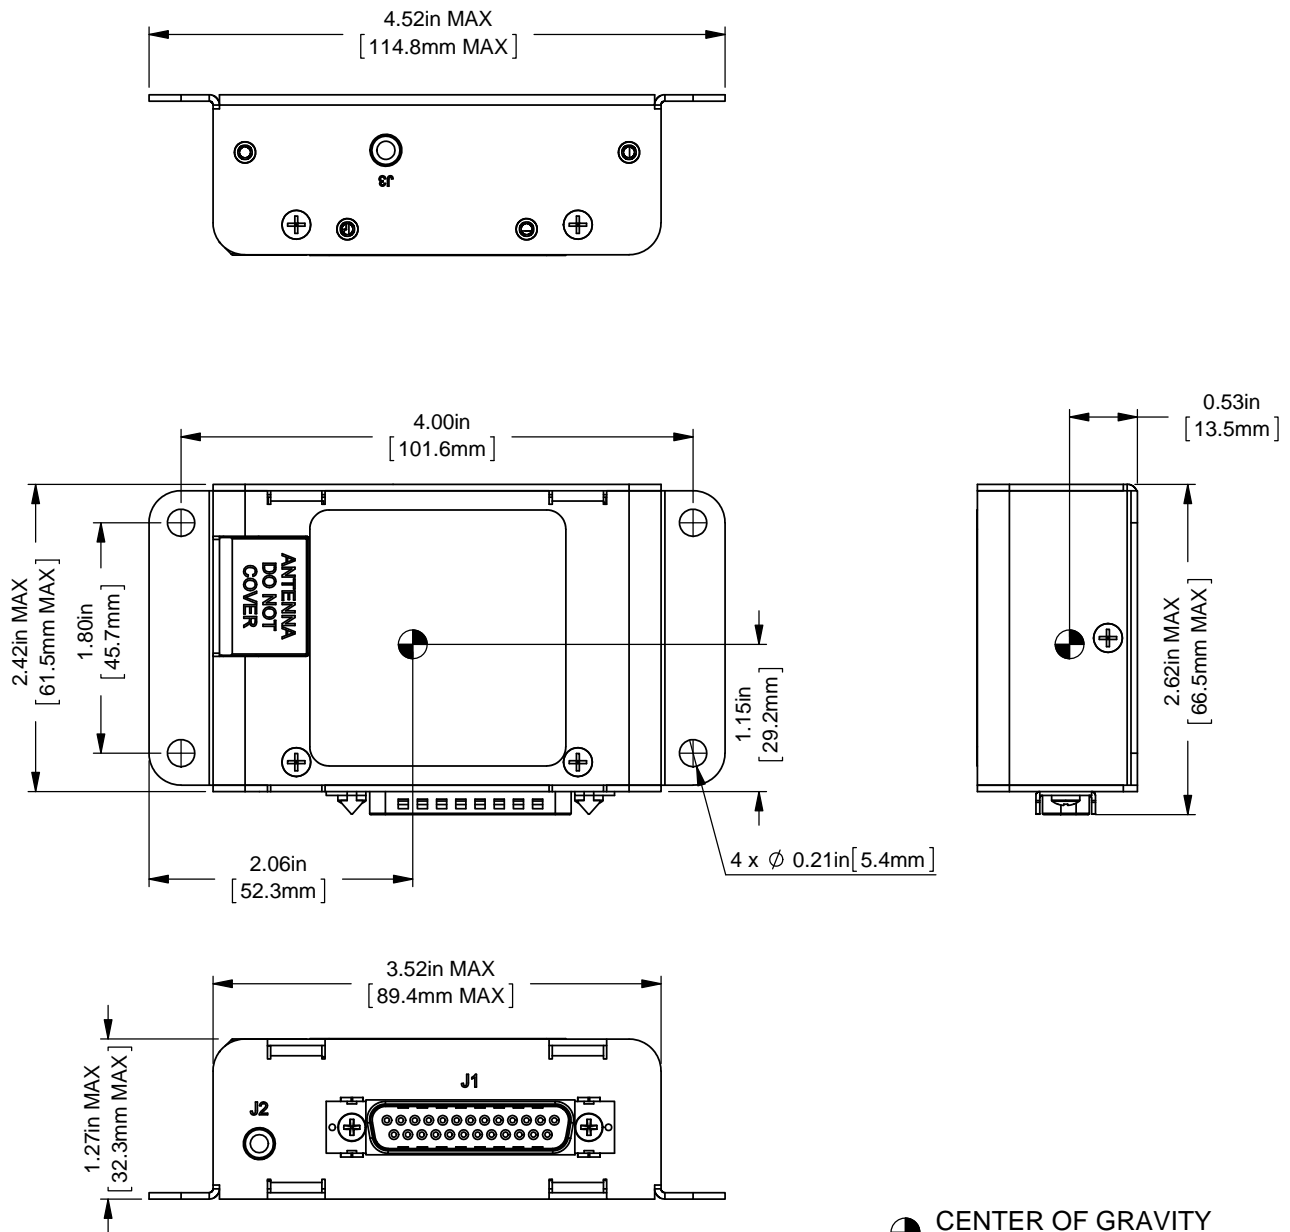


 CENTER OF GRAVITY
 ± 0.03 in [0.8mm]

WEIGHT: 0.43 lbs [0.20 kg] MAX.

<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES ANGLES ARE IN DEGREES TOLERANCES: 1 DEC PLACE: ± 0.1 2 DEC PLACE: ± 0.01 3 DEC PLACE: ± 0.005 ANGLES: ± 0.5 DEG</div> <div></div>	PREPARED	TAT	<div></div>		
	CHECKED	<div>JAC 06-05-15 DS</div>			
	APPROVED	<div>JAC 06-05-15 KDV</div>	TITLE <div>Universal Radio Adapter with Bluetooth</div>		
	CONFIDENTIAL & PROPRIETARY TO JUPITER AVIONICS CORP. DRAWING NOT TO SCALE		NCAGE CODE L00N3	PART NO. JA34-BT1	SHEET 1/1
MATERIAL: N/A			DOC. NO. JA34-BT1 Mechanical Installation Rev C.SLDDRW		
FINISH: N/A					

Installation and Operating Manual

Appendix B - Installation Documents



B1 **Airworthiness Approval**

Airworthiness approval of the JA34-BT1 may require completion of a TCCA Major Modification Report per CAR STD (AWM) 571 Appendix L, or a FAA Form 337. The sample wording for a description of the work is provided to assist the Installing Agency in preparing Instructions for Continued Airworthiness (ICA) when replacing an existing radio adapter with a Jupiter Avionics JA34-BT1 Universal Radio Adapter with Bluetooth. This sample may be modified appropriately for new installations. It is the installer's responsibility to determine the applicability of the method used. Installations performed outside the USA and Canada must follow the applicable aviation authority's regulations.

Sample Wording:

Removed the existing [model] radio adapter and replaced with a Jupiter Avionics JA34-BT1 Universal Radio Adapter with Bluetooth in [aircraft location].

Installed in accordance with the JA34-BT1 Installation & Operating Manual, Revision [], and AC 43.13-2, Chapters 2, and 3.

The JA34-BT1 interfaces with existing aircraft radios per the Installation & Operating Manual instructions.

The JA34-BT1 Installation & Operating Manual provides detailed installation instructions and wiring diagrams (Section 2, and Appendices A and B).

Power is supplied to the JA34-BT1 through a 1.0-Amp circuit breaker.

Aircraft equipment list, weights and balance amended. Compass compensation checked and found to conform to applicable regulations.

B2 **Instructions for Continued Airworthiness**

Maintenance of the JA34-BT1 Universal Radio Adapter with Bluetooth is "on condition" only. Refer to the JA34-BT1 Maintenance Manual. Periodic maintenance of the JA34-BT1 is not required.

The following sample Instructions for Continued Airworthiness (ICA) provides assistance in preparing ICA for the Jupiter Avionics JA34-BT1 unit installation as part of a Type Certificate (TC) or Supplemental Type Certificate (STC) project to comply with CAR STD (AWM) 523/527/525/529.1529 or FAR 23/25/27/29.1529 "Instructions for Continued Airworthiness".

Items that may vary by aircraft make and model are shown in brackets ("[]") and should be filled in as appropriate. Some of the checklist items do not apply, in which case they should be marked "N/A" (Not Applicable).

Instructions for Continued Airworthiness, Jupiter Avionics JA34-BT1 Universal Radio Adapter in an [Aircraft Make and Model]

1. Introduction

[Aircraft that has been altered: Registration number, Make, Model and Serial Number]

Content, Scope, Purpose and Arrangement: This document identifies the Instructions for Continued Airworthiness for a Jupiter Avionics JA34-BT1 installed in an [aircraft make and model].

Applicability: Applies to a Jupiter Avionics JA34-BT1 installed in an [aircraft make and model].

Definitions/Abbreviations: None, N/A.

Precautions: None, N/A.

Units of Measurement: None, N/A.

Referenced Publications: JA34-BT1 Installation & Operating Manual
JA34-BT1 Maintenance Manual

STC/TC # [applicable STC/TC number for the specific aircraft installation]

Distribution: This document should be a permanent aircraft record.

2. Description of the System/Alteration

Jupiter Avionics JA34-BT1 Universal Radio Adapter with Bluetooth interfaces to external transceivers and [include other equipment/systems as appropriate]. Refer to Appendix A of this manual for interconnect information. Refer to aircraft manufacturer approved interconnect for actual installation.



3. Control, Operation Information

Refer to section 3 of this manual.

4. Servicing Information

N/A

5. Maintenance Instructions

Maintenance of the JA34-BT1 is 'on condition' only. Periodic maintenance is not required. Refer to the JA34-BT1 Maintenance Manual.

6. Troubleshooting Information

Refer to the JA34-BT1 Maintenance Manual.

7. Removal and Replacement Information

Refer to Section 2 of this manual - the JA34-BT1 Installation & Operating Manual. If the unit is removed and reinstalled, a functional check of the equipment should be conducted.

8. Diagrams

Refer to Appendix A of this manual - the JA34-BT1 Installation & Operating Manual - for installation drawings and interconnect examples.

9. Special Inspection Requirements

N/A

10. Application of Protective Treatments

N/A

11. Data: Relative to Structural Fasteners

JA34-BT1 and appropriate mounting hardware installation, removal and replacement should be in accordance with applicable provisions of AC 43.13-1B and AC 43.13-2A.

12. Special Tools

N/A

13. This Section is for Commuter Category Aircraft Only

A. **Electrical loads:** Refer to Section 1 of the JA34-BT1 Installation and Operating Manual.

B. **Methods of balancing flight controls:** N/A.

C. **Identification of primary and secondary structures:** N/A.

D. **Special repair methods applicable to the airplane:** N/A.

14. Overhaul Period

No additional overhaul time limitations.

15. Airworthiness Limitation Section

N/A