



## JA94-x44A Dual Audio Controller

### Data Sheet

**PIN for PIN  
Compatible with  
AMS44!**




### Description

The JA94-044A dual audio controller is a compact, lightweight unit that incorporates the latest technology, and is compatible with the current industry standard interconnect. The transceiver selection order is the same as the AMS44. The unit will support 8 users: pilot, co-pilot and up to 6 passengers. By using a Windows® based application (ProCS™), configuration settings may be changed via a 3.5mm jack on the front panel. Field replaceable illuminated legends (either standard white or NVG compatible) mean that the dealer only needs to order one version of the controller for many different mission configurations.


### Features

- 6 transceivers
- Up to 8 users
- Field configurable settings
- Field replaceable legends
- Standard white or NVG compatible
- Adjustable output and input levels
- Balanced ICS, CVR, Rx Comp. & transmit mic. outputs
- Adjustable CVR output level
- Front panel music input
- 5, 14 and 28 Vdc lighting voltage selection
- Music muting
- Duplex mode transmission for telephone operation
- 4 Receivers
- 3 Direct inputs
- 5.48 inches [139mm] depth behind panel (not including connectors)
- Individual mic. gating
- Tx capability for pilot, co-pilot and up to 3 passengers
- Transmit select annunciators
- Simulcast TX capability
- Connector pin compatible with industry standard
- ICS isolation external input
- Remote transmit selection
- ICS PTT for all 8 users
- COM6 artificial side tone



# JA94-x44A Specifications

## Installation

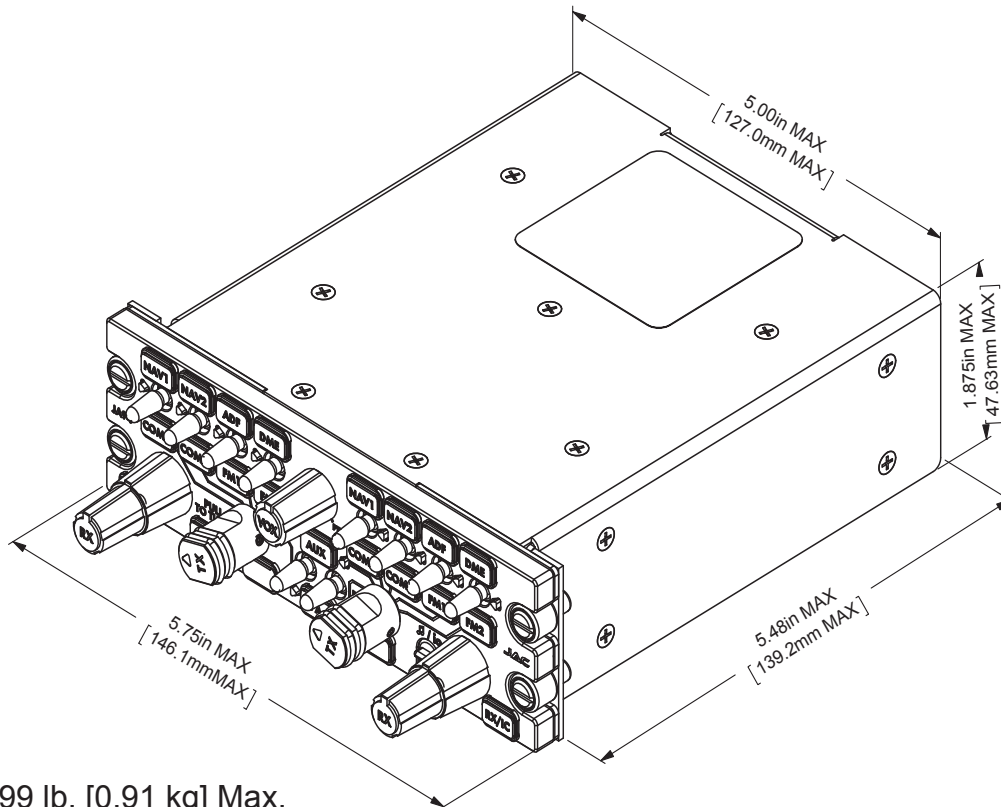

Weight: 1.99 lb. [0.91 kg] Max.

JA94-044A Standard White Lighting

JA94-N44A NVG Compatible

## Environment and Performance

Transceivers		6 Comm. transceivers
Receiver Input		4 Receivers + 3 Direct, 2 Music Inputs, 1 ICS Tie
Number of Headsets		8 users: Pilot, Co-pilot, 6 passengers
Electrical	Power	0.95A @ 28 Vdc max
	Lighting	<10mA @ 5, 14, 28 Vdc
Temperature	Operational	-45 °C to +70 °C
	Survival	-55 °C to +85 °C
Altitude		55,000 ft. max
Humidity		95%
Shock		6g (any axis)
Headphone		250 mW into 600 ohms
TSO Compliance		Contact JAC for TSO status
Installation Kit		INST-JA94